BLUETOOTH F/W

Download Manual


SBT-M2

Rev.D 10 / 2026
Aroot Co., Ltd.
The manual and product are protected by copyright.

Directory

Common configuration	3
Chapter 01. Android OS	4
Chapter 02. Windows OS	7

You can see bluetooth version on “Self Test” If the version is lower than yours, do update.

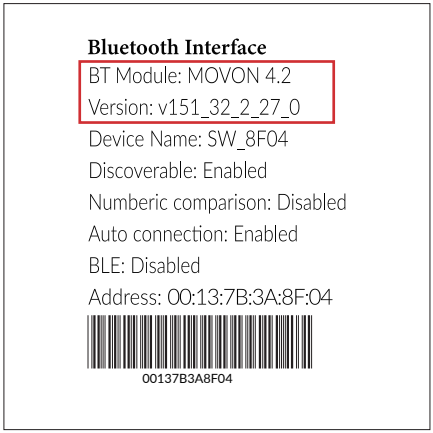

01 Download and execute the program from the website.
- POS Printer : Memory Saver.exe
- Label Printer : Configuration Tool.exe
- Mobile Printer : Printer Gear.exe

02 Refer to “Manual” and set the printer to “BLE Enable”.
- POS Printer : Memory Saver Manual
- Label Printer : Configuration Manual
- Mobile Printer : Printer Gear Manual

03 Reboot printer

04 Download and install the app from the website

ⓒ Aroot Co., Ltd. All rights reserved.

01 Run LE OTA 

.

02 Click “Tab to select a device” and select “MOVON_BLE”.





ⓒ Aroot Co., Ltd. All rights reserved.

03 Click “Connect”.

04 Click “Tab to select OTA image”.



ⓒ Aroot Co., Ltd. All rights reserved.

05 Select OTA image file to use, then press “Update” button.


06 You can see “Success”.



ⓒ Aroot Co., Ltd. All rights reserved.

01 Download and install BCC210OtaTool.exe


02 Run BCC210OtaTool.exe

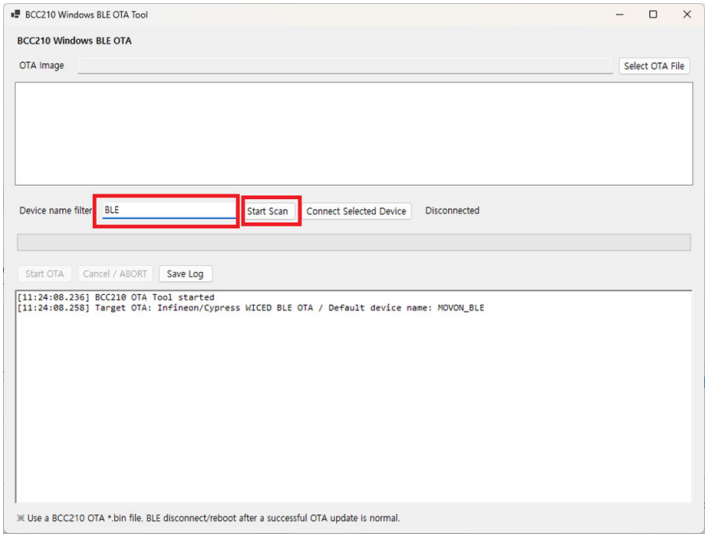

ⓒ Aroot Co., Ltd. All rights reserved.


03 Enter the desired device name in the Device name filter, then click Start Scan.

(The default value is MOVON_BLE, so MOVON_BLE is entered automatically when the program starts.) If no filter is entered, all nearby Bluetooth devices will be scanned, and the device list will continue updating until Stop Scan is clicked.

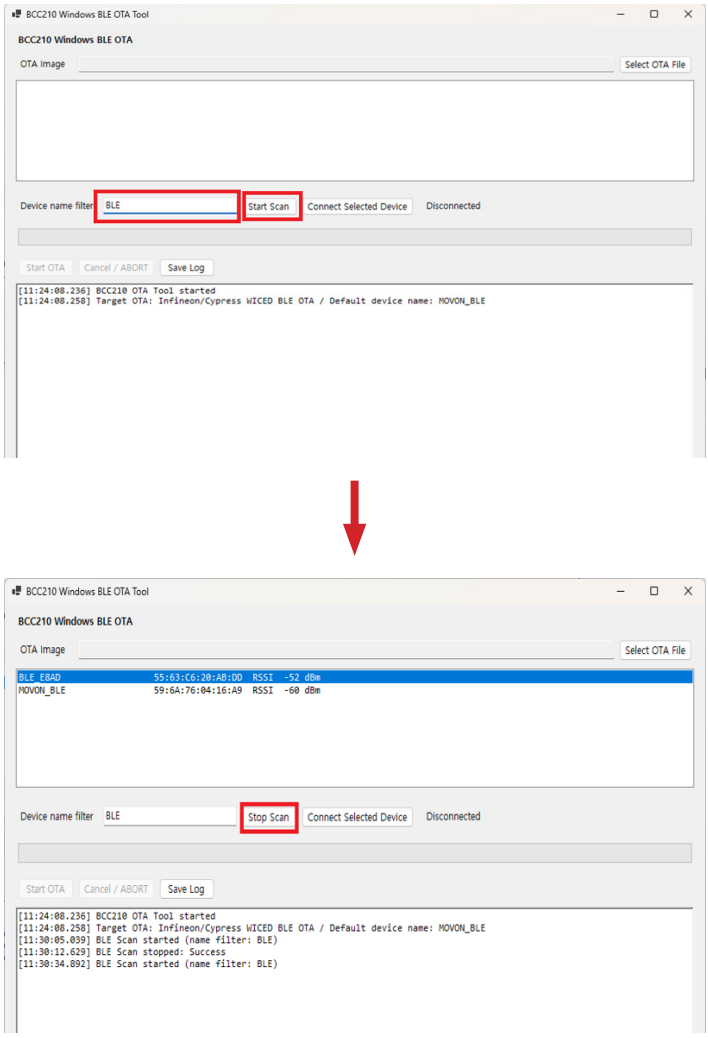


ⓒ Aroot Co., Ltd. All rights reserved.

04 After device scanning is complete, click Stop Scan, then click Connect Selected Device.

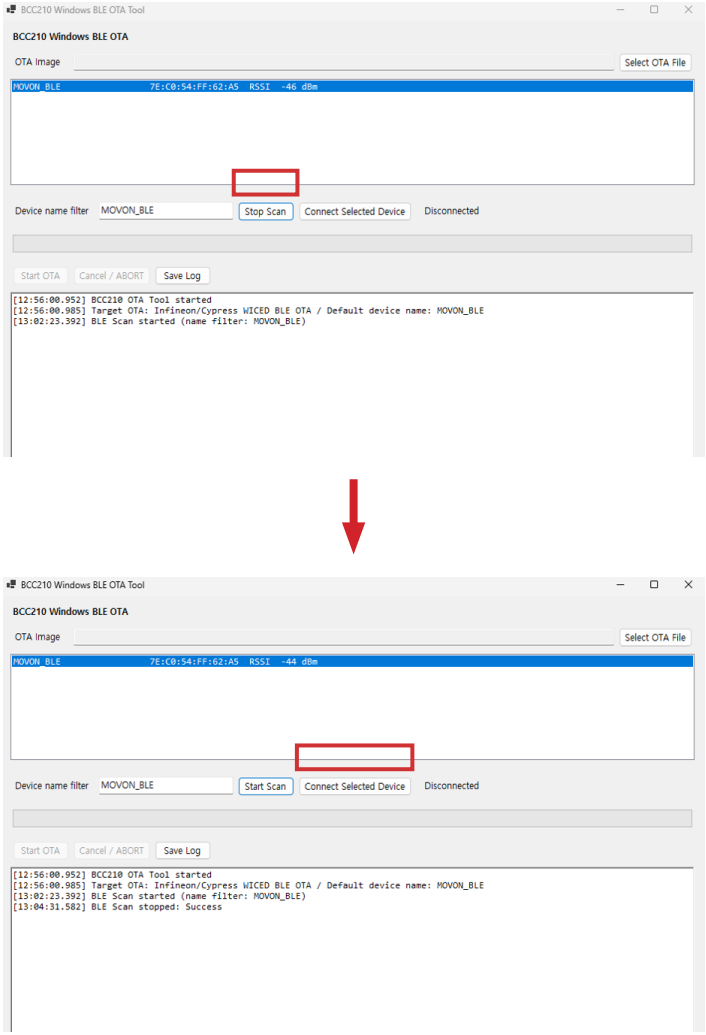


ⓒ Aroot Co., Ltd. All rights reserved.

(When the connection is successful, the connection status changes to Connected as shown below.)

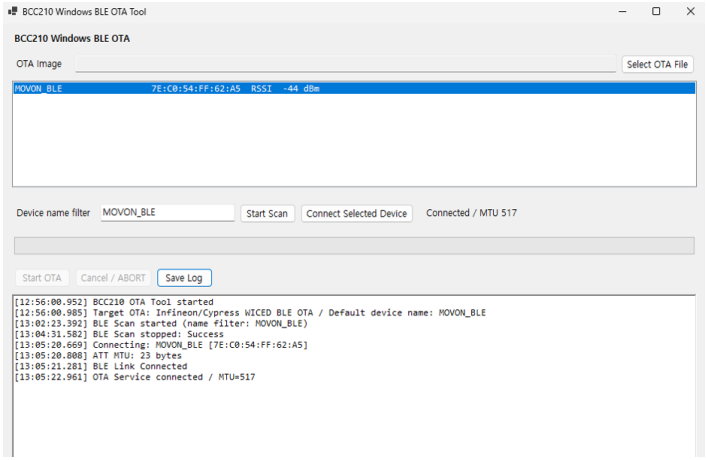


ⓒ Aroot Co., Ltd. All rights reserved.

05 Click Select OTA File and select the firmware file to update.
(When the file is selected successfully, the Start OTA button will be enabled.)

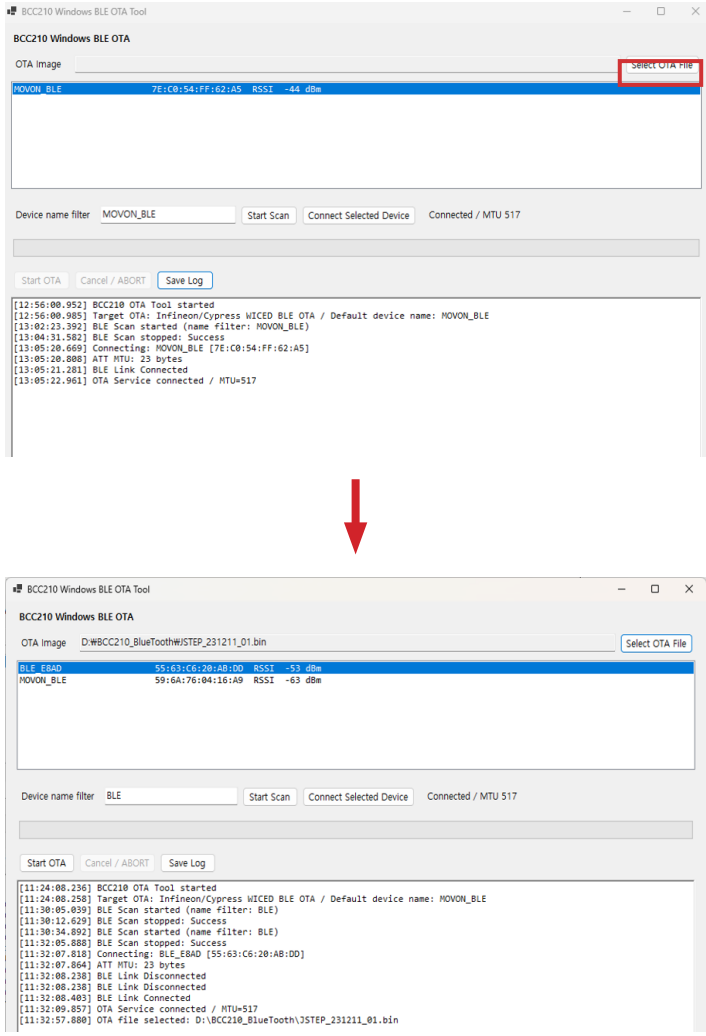


ⓒ Aroot Co., Ltd. All rights reserved.

06 Click Start OTA.

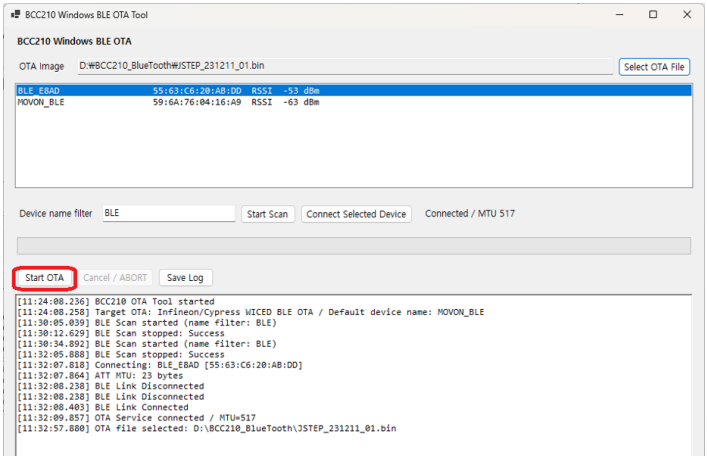

ⓒ Aroot Co., Ltd. All rights reserved.

07 When the pop-up shown below appears, verify the firmware file name and click OK.

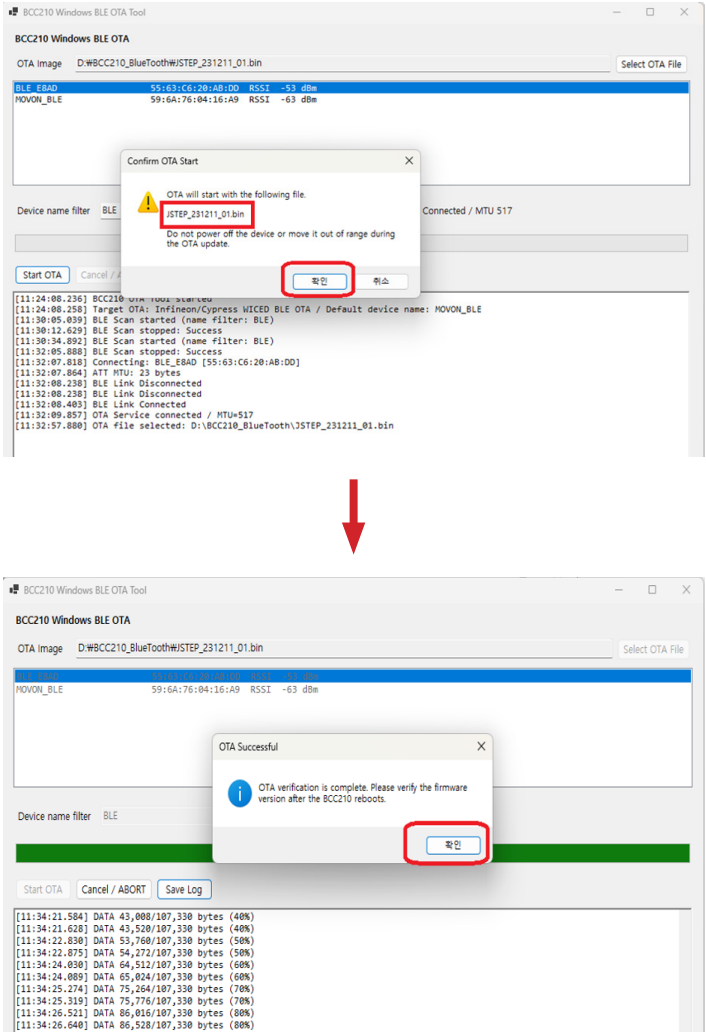

ⓒ Aroot Co., Ltd. All rights reserved.



Aroot Co., Ltd.

28-6, Gajangsaneopdong Road, Osan City,
Gyeonggi Province, South Korea
Tel. +82-31-8077-5000 / Fax. +82-31-624-5310
www.miniprinter.com