28-6, Gajangsaneopdong-ro,
Osan-si, Gyeonggi- do, 18103, Republic of Korea
TEL : +82-31-8077-5000 / FAX : +82-31-624-5310
http://www.miniprinter.com

sewoo

F/W DOWNLOAD MANUAL

- LK-P400 -

Rev.B 08 / 2022
Aroot Co., Ltd.
The manual and product are protected by copyright.

INDEX

1. Download Printer Firmware 2
2. Recovery Mode 4
3. Download SD Card File 6

1. Download Printer Firmware


NOTE

If your LK-P400 printer's F/W version is less than V2.71, F/W Update is required in Recovery Mode.


Please refer to How to Enter Recovery Mode on page 5.

01 Execute the program "FW Download Program.exe".

02 Select Model "LK-P400".

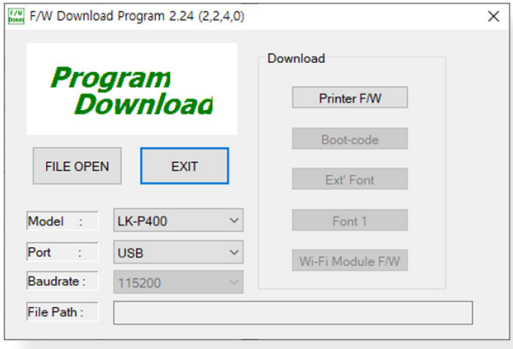


03 Choose the rom file(*.rbn) after clicking “FILE OPEN” button.

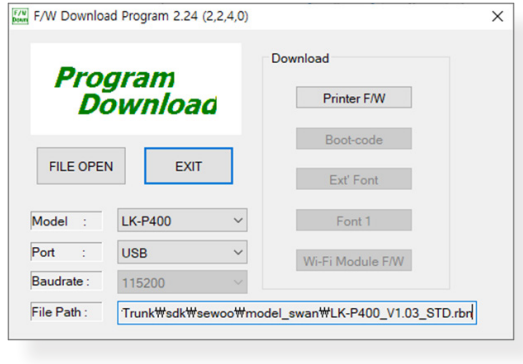

04 Click the button “Printer F/W”.

05 When the following message shows up, click “Yes” button

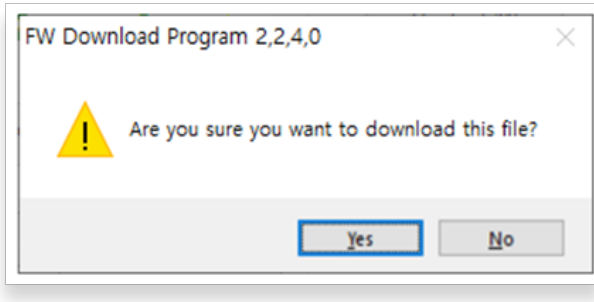

06 Printer power will turn off, when download process completed.

– Downloading process will takes about 1minutes 30second.

2. Recovery Mode

01 Press both button (see below picture) at the same time, when Printer power off.



02 Powering printer on with “SEWOO” logo image.



03 Download mode will be ready when “Download Application” image displayed.




04 If “Download Application” image displayed, ready to download now.

– Download process is same as “Download printer firmware step.


3. Download SD Card File

01 Execute the program “FW Download Program.exe”


02 Select Model “LK-P400”.

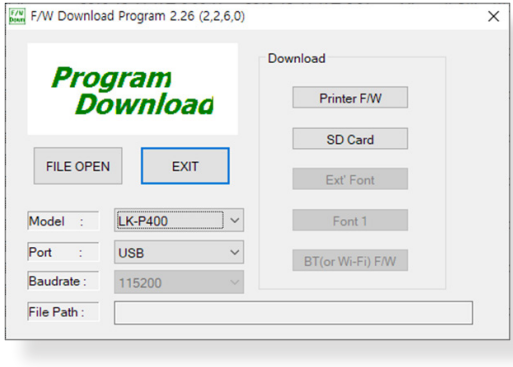

03 Click the “SD Card” button and Select SD Card Folder.

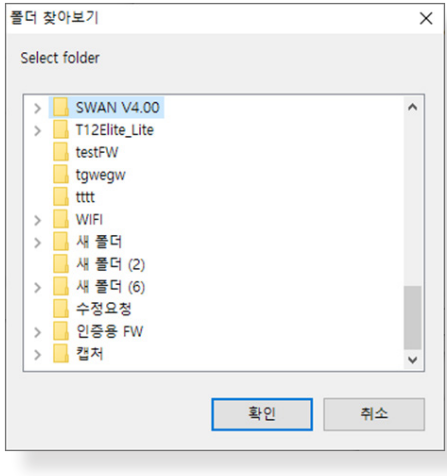

04 When the following message shows up, click “Yes” button.

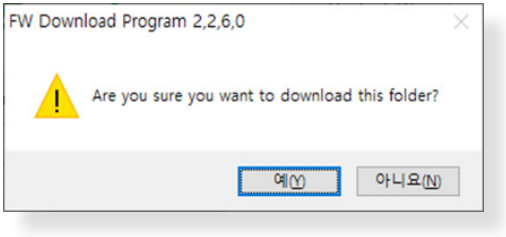

05 Printer power will turn off, when download process completed.

– Downloading process will takes about 5~10 Second.